


Product Datasheet

Alkaline

LR14 Pro Power



LR14PPG

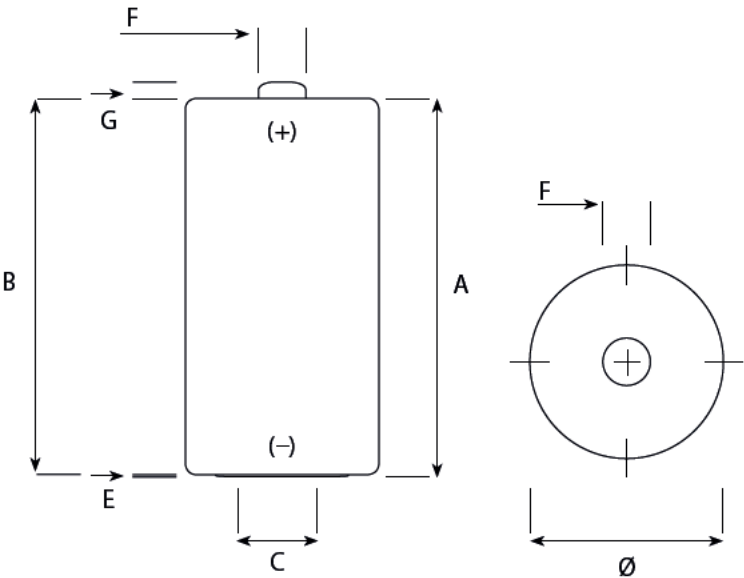

IEC Dimensions (mm)			Panasonic Dimensions (mm)
Dimension	Maximum	Minimum	Typical
A	50,0		49,6
B		48,6	49,3
C		13,0	17,4
E	0,9		0,3
F	7,5		6,3
G		1,5	2,2
Ø	26,2	24,9	25,4

Name	LR14 / L / C / AM2 / BABY / MN1400 / 14A / 14AC
Made in	Belgium
Type	Alkaline Foil
Nominal Voltage	1,5 Volt
Electrolyte	Potassium Hydroxide
Average weight	69,5 g
Storage temp. range	+10°C (50°F) ~ + 25°C (77°F)
Operating temp. range	-20°C (-4°F) ~ + 55°C (131°F)
Average Impedance	+/- 100 m-Ohm @ 1kHz fresh
Heavy metals	No added mercury (Hg), Cadmium (Cd) or Lead (Pb)
Compliant to	IEC 60086 non dangerous goods regulation EC directive 91/157EC & 98/101EC
Recommended cut off voltage	0,8V per cell

For more information:


www.panasonic-batteries.com

Panasonic


Typical discharge values

LR14PPG


LIF 4m/h 24h/d 3,9 ohm tot 0,9 volt

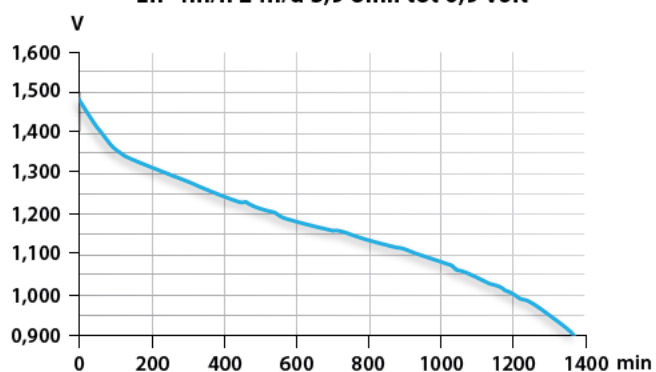

Stereo 2h/d 400 mA end 0,9 V

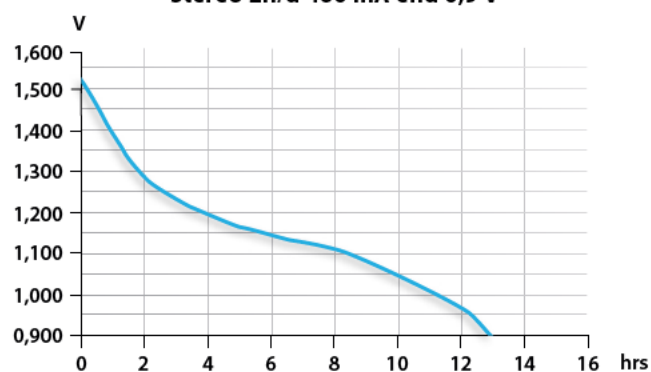

Motor: 1h/d 3,9 ohm end 0,8 V

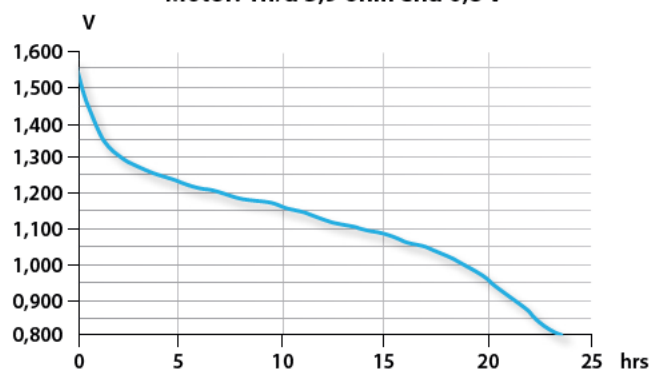

Radio 4h/d 20 ohm end 0,9 V

